



Solder this side Towards the

FLETCHER

CoilSplit




All PCB boards are marked for FletcherPickups wire colours.

Both sides of the board work independently so you can use one side for the Neck & one for the Bridge pickup.

R/G W/R G/B B/W relate to the four lead wires, Red, White, Green & Black. Bare wire to ground always.

R/G
W/R
G/B
B/W


Soldering the **bold** wires will drop the **South/bridge-facing** coil.




North/Neck coil ON
South/Bridge coil OFF

Soldering the **bold** wires will drop the **North/neck-facing** coil.

R/G
W/R
G/B
B/W




North/Neck coil OFF
South/Bridge coil ON

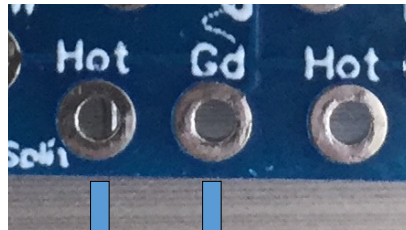

Output to Switch or Pot, depending on your schematic.

Remember to link the Board, pot & bare wire to circuit Ground.

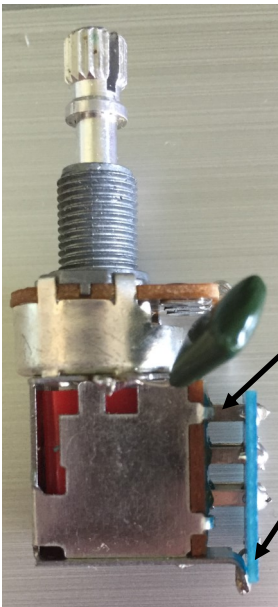

Leave a gap between the board and the pot base when soldering.

Bend back the metal tag and solder this to the board Ground.

